

PROPER PREPARATION NEW WOOD


**PRO
TIP**



If using CUTEK® Wood Reviver OR CUTEK® Wood Stripper you must rinse off with a pressure washer per application instructions. Garden hose is not sufficient.

SINGLE STRENGTH CUTEK® COLORTONES
1 Gallon = 1 Colortone
5 Gallon = 5 Colortones

DOUBLE STRENGTH CUTEK® COLORTONES
1 Gallon = 2 Colortones
5 Gallon = 10 Colortones

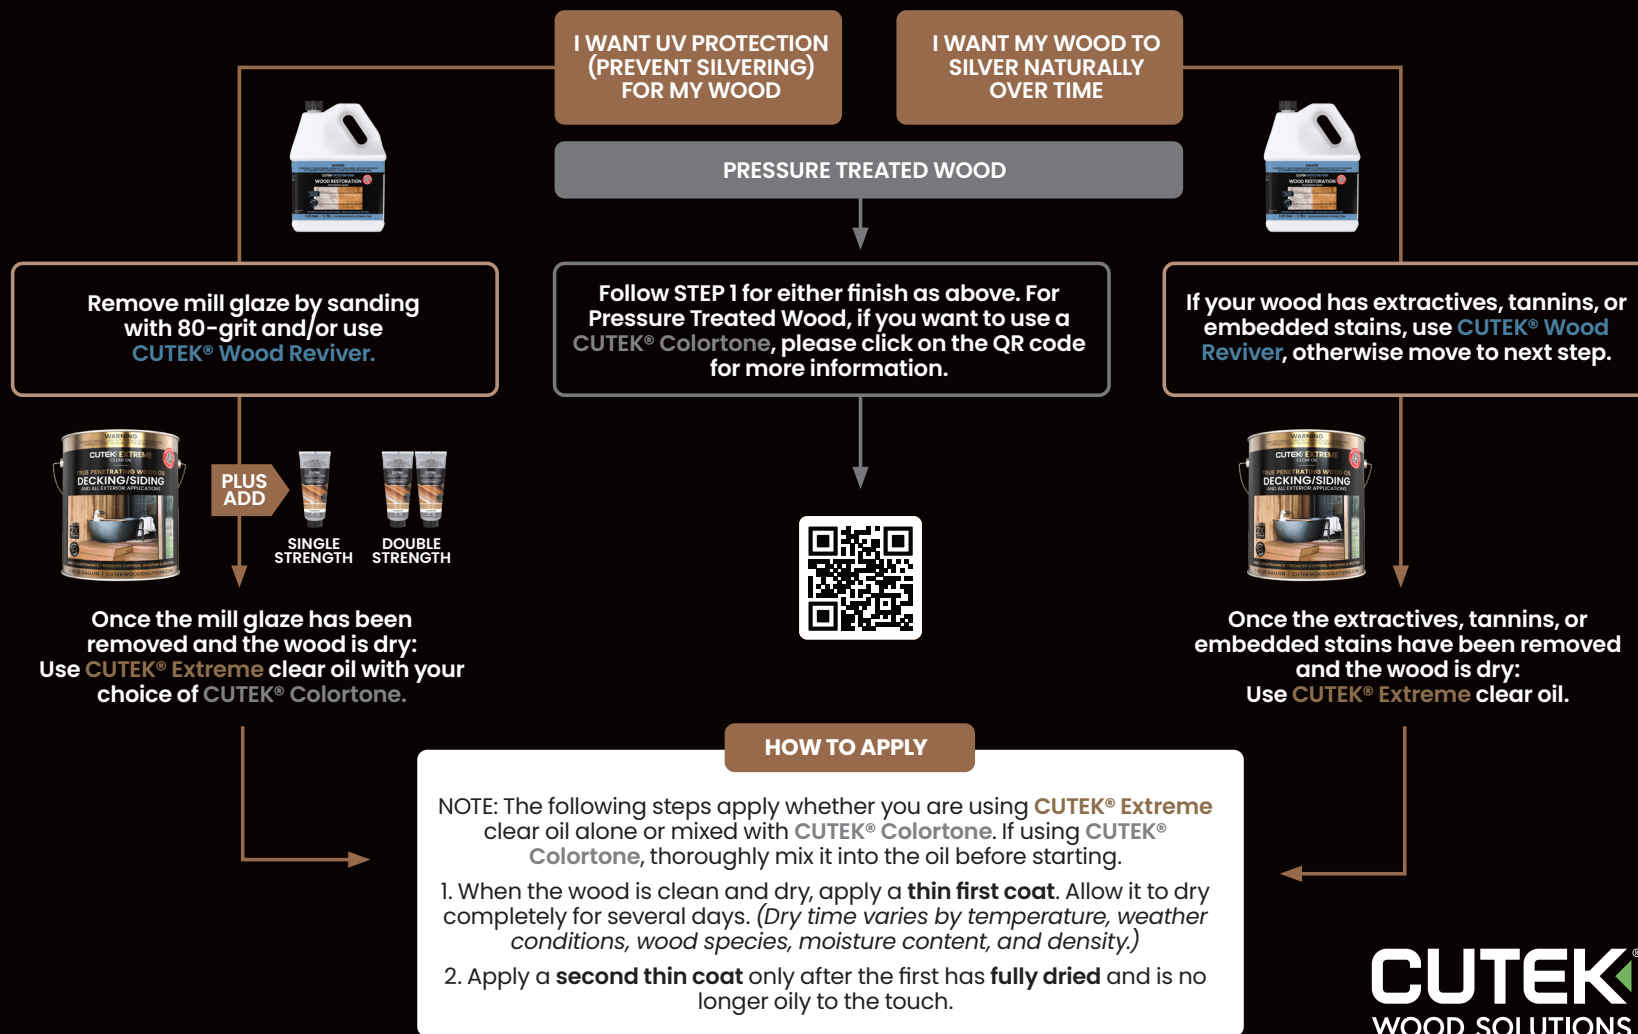

CUTEK®
WOOD SOLUTIONS

PROPER PREPARATION OLD WOOD

**PRO
TIP**



If using CUTEK® Wood Reviver OR CUTEK® Wood Stripper you must rinse off with a pressure washer per application instructions. Garden hose is not sufficient.

SINGLE STRENGTH CUTEK® COLORTONES
1 Gallon = 1 Colortone
5 Gallon = 5 Colortones

DOUBLE STRENGTH CUTEK® COLORTONES
1 Gallon = 2 Colortones
5 Gallon = 10 Colortones



I WANT UV PROTECTION (PREVENT SILVERING) FOR MY WOOD



I WANT MY WOOD TO SILVER NATURALLY OVER TIME



MY WOOD WAS PREVIOUSLY COATED WITH CUTEK® EXTREME



If previously coated, remove to bare wood using CUTEK® Wood Stripper or sand with 80-grit, followed by CUTEK® Wood Reviver.
If weathered only (no prior coating), restore with CUTEK® Wood Reviver.

Clean with CUTEK® Quickclean (1:8) per instructions and rinse thoroughly.



**PLUS
ADD**



**SINGLE
STRENGTH**

**DOUBLE
STRENGTH**

Once the wood is clean and dry (and any previous coating is removed):
Use CUTEK® Extreme clear oil with your choice of CUTEK® Colortone.



Once the wood is clean and dry (and any previous coating is removed): Use CUTEK® Extreme clear oil.



**PLUS
ADD**



**SINGLE
STRENGTH**

**DOUBLE
STRENGTH**

Once the wood is clean and dry:
Use CUTEK® Extreme clear oil with or without your choice of CUTEK® Colortone.

HOW TO APPLY

NOTE: The following steps apply whether you are using CUTEK® Extreme clear oil alone or mixed with CUTEK® Colortone. If using CUTEK® Colortone, thoroughly mix it into the oil before starting.

1. When the wood is clean and dry, apply a **thin first coat**. Allow it to dry completely for several days. (Dry time varies by temperature, weather conditions, wood species, moisture content, and density.)
2. Apply a **second thin coat** only after the first has **fully dried** and is no longer oily to the touch.

HOW TO APPLY

Apply one **thin coat** of CUTEK® Extreme clear oil with or without CUTEK® Colortone.

CUTEK®
WOOD SOLUTIONS